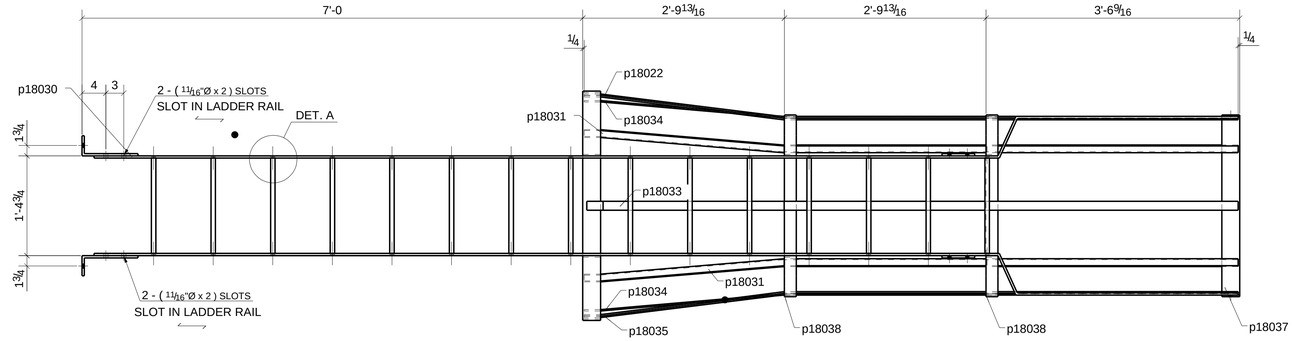

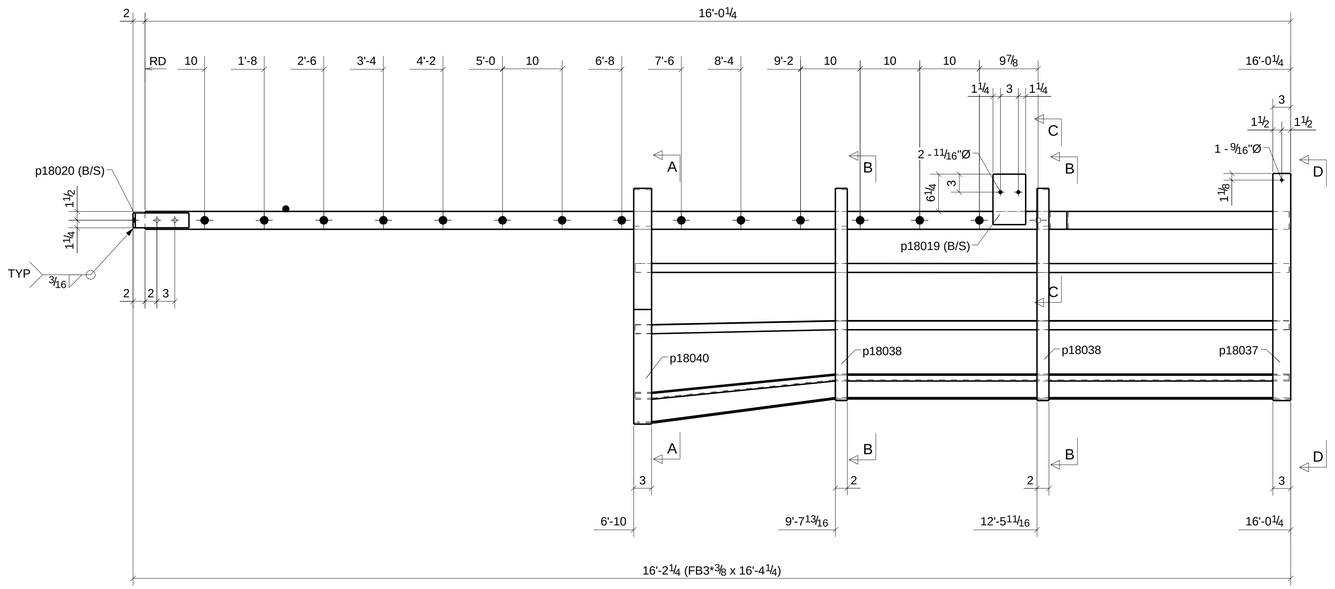





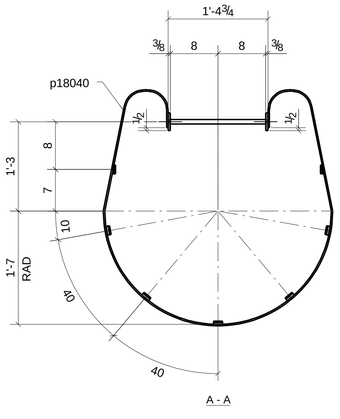

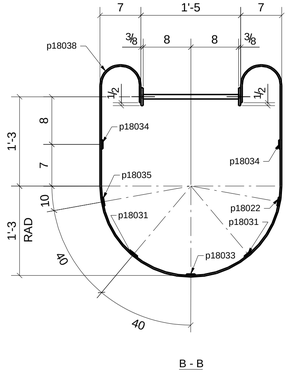

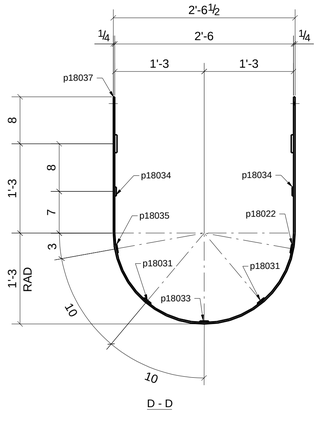

ONE PLATE REQ'D AS DRAWN MK LD18001

GRID LOCATION
D/B1

BILL OF MATERIAL

ABM MARK	MARK	QTY	MATERIAL	LENGTH FT. IN.	TOTAL WEIGHT	GRADE	REMARKS
	LD18001	1	FB3*3/8	16'-4 1/4"	62	A36	
	p18019	2	PL3/8"X5 1/2"	0'-8 1/2"	9.9	A36	
	p18020	2	FB3/8"X2 1/2"	1'-0 3/8"	6.6	A36	
	p18022	1	FB1"1/2*1/4	9'-2"	11.7	A36	
	p18030	1	FB3*3/8	16'-4 1/4"	62.6	A36	
	p18031	2	FB1"1/2*1/4	9'-2"	23.4	A36	
	p18033	1	FB1"1/2*1/4	9'-1 9/16"	11.7	A36	
	p18034	2	FB1"1/2*1/4	9'-1 7/8"	23.4	A36	
	p18035	1	FB1"1/2*1/4	9'-2"	11.7	A36	
	p18037	1	FB3*1/4	7'-8 7/8"	19.8	A36	
	p18038	2	FB2*1/4	8'-10 15/16"	30.5	A36	
	p18040	1	FB3*1/4	10'-1 3/8"	26.0	A36	
	p18041	15	SQUARE_BAR_3/4"	1'-4 3/8"	39.2	A36	2-FULL TWISTS PER LADDER RUNG
				TOTAL WEIGHT	337		
	LD18001		BOLT QTY'S ARE FOR ONE ASSEMBLY ONLY				
		2	5/8" Ø BOLT	0'-1 5/8"		A36	Site
		4	5/8" Ø BOLT	0'-1 3/4"		A307	Site
		4	5/8" Ø BOLT	0'-1 3/4"		A307	Workshop

GENERAL NOTES:

1) ALL MATERIAL = A36 (UN)
2) ALL HSS MATERIAL = A500-B (UN)
3) DEBURR ALL HOLES
4) NO PAINT 3" AROUND OPEN HOLES MARKED "SC"

PRINT RECORD					
DATE	NO. PRTS	FOR	DATE	NO. PRTS	FOR

NO.	DATE	REVISION

E-DWG. REF.: E18002

BOLTS: 3/4" DIA. A325N
OPEN HOLES: 13/16" DIA.
PAINT: PS1
CLEAN: PS1

UNLESS NOTED